

3 Year Warranty

L70 35,000hrs

White finish



works with

.control

On/Off Relay  
See pg.37



# EcoT8™

Single & twin slimline battens

make smart with



See pg.218-219 for compatibility table

Steel housing and high quality polycarbonate diffuser eliminates hot spots providing uniformed low glare light output

Delivering up to 97lm/W


Perfect for retrofitting existing installations or as an alternative to T8 or T5 fluorescent fittings

Twin version available with winged reflectors for reduced glare


Easy access rear terminal block

Integrated driver supplied in housing



EN-BT1218

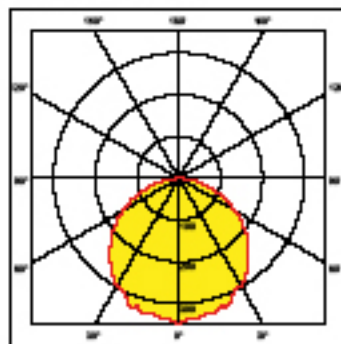

EN-BT1233

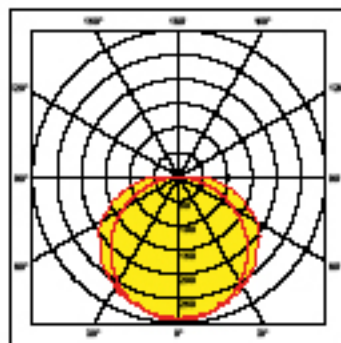

EN-BTW1236

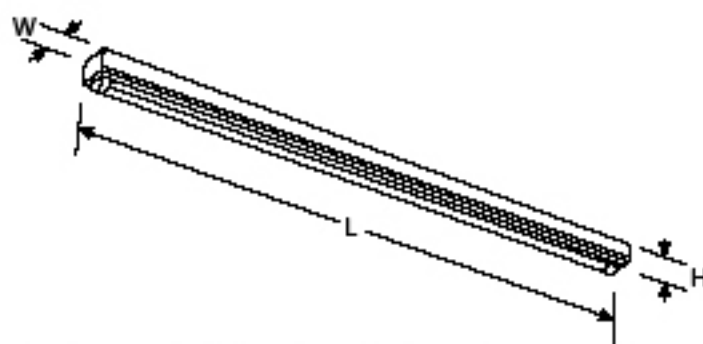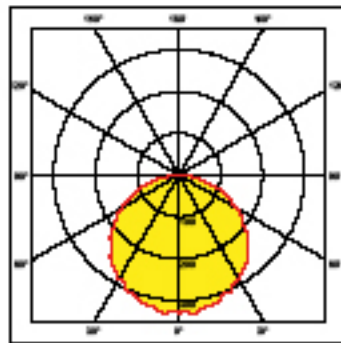

All products - Height 35mm

- EN-BT1218** (L) 1220mm Length (W) 55mm Width
- EN-BT1522** (L) 1520mm Length (W) 55mm Width
- EN-BT1827** (L) 1820mm Length (W) 55mm Width
- EN-BT1233** (L) 1220mm Length (W) 85mm Width
- EN-BT1544** (L) 1520mm Length (W) 85mm Width
- EN-BT1851** (L) 1820mm Length (W) 85mm Width
- EN-BTW1236** (L) 1220mm Length (W) 85mm Width
- EN-BTW1544** (L) 1520mm Length (W) 85mm Width
- EN-BTW1854** (L) 1820mm Length (W) 85mm Width



Single Open



Twin Winged

Linears

Cat. No. Type Watts Colour Lumens lm/W Length (ft)

**Single Without Wing Reflector**

<b>EN-BT1218/40</b>	Non-Dim	18W	4000K	1600lm	89	4
<b>EN-BT1522/40</b>	Non-Dim	22W	4000K	2100lm	95	5
<b>EN-BT1827/40</b>	Non-Dim	27W	4000K	2500lm	93	6

**Twin Without Wing Reflector**

<b>EN-BT1233/40</b>	Non-Dim	33W	4000K	3200lm	97	4
<b>EN-BT1544/40</b>	Non-Dim	44W	4000K	4100lm	93	5
<b>EN-BT1851/40</b>	Non-Dim	51W	4000K	4500lm	88	6

**Twin With Wing Reflector**

<b>EN-BTW1236/40</b>	Non-Dim	33W	4000K	3200lm	97	4
<b>EN-BTW1544/40</b>	Non-Dim	44W	4000K	4100lm	93	5
<b>EN-BTW1854/40</b>	Non-Dim	51W	4000K	4500lm	88	6

